

Model 101B(c) Pressure Sensors with Customized Housing

Description

Model 101B(c) pressure sensor (PS) features a customized housing with one of the 101B-series PSs (e.g., 101B(a19G) or 101B(a19L)) integrated in it. As a result, the 101B(c) PS has an inner-cavity structure formed by its housing and the integrated PS. All materials of the inner-cavity are made from 316L stainless steel and will have directly contact to pressure medium. Thanks to the customized housing, a variety of threads (e.g., G1/4) and hexagon (e.g., SW27) can be made for mechanical installation of this PS to fit different pressure applications.

The 101B(c) PS is mostly used to build pressure transmitters by adding both an SSC (sensor signal conditioner) at its backside, a housing for SSC via its M24x1 threads and a connector for both power supply and signal output.

The working pressure will be measured by the integrated PS (e.g., 101B(a19G)), which functions as a core of the 101B(c) PS. The working principle of the 101B(c) PS is determined by the integrated PS.


The pressure medium has to be dilute liquid or gas in order to be introduced inside the inner cavity of the 101B(c) PS. Thanks to the stainless steel wetted parts, the pressure medium can be corrosive or conductive as long as it is compatible to 316L stainless steel.



Features

- pressure types & ranges:
 - gauge: -1, ..., 35 bar
 - absolute: 1, ..., 400 bar
 - sealed gauge: 600, ..., 1000 bar
- accuracy up to 0.25%fs
- rugged, isolated stainless steel housing
- outstanding sensitivity and reliability
- temperature compensated
- excited by either current or voltage

Dimensions

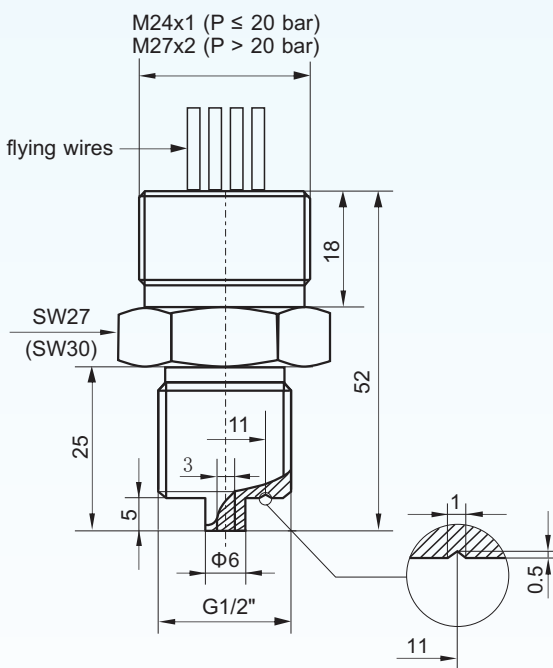

Note: All dimensions are in mm.

Applications

- process control systems
- industrial controls
- pneumatic and hydraulic controls
- pressure transducers and transmitters
- pressure calibrators

Environmental Specifications

- position effect: < 0.1% of zero offset shift in any direction
- vibration effect: no change at 10 g (RMS), 20~2000 Hz
- shock: 100 g, for 10 millisecond

BCM SENSOR TECHNOLOGIES BVBA

Model 101B(c) Pressure Sensors with Customized Housing



Technical Data

Parameters		Units	Specifications	Notes
pressure medium			compatible with pressure diaphragm	
pressure types & ranges	gauge	bar	-1~0, 0~0.1, ~0.2, ~0.35, ~0.7, ~1, ~2, ~4, ~6, ~10, ~16, ~20, ~35	1
	absolute	bar	0~0.7, ~1, ~2, ~4, ~6, ~10, ~16, ~20, ~35, ~70, ~100, ~250, ~400	
	sealed gauge	bar	0~600, ~1000	
proof pressure		%fs	200, 150 in case of ranges \geq 100bar	2
burst pressure		%fs	300, 200 in case of ranges \geq 100bar	
output signal	standard	mV	\geq 60, \geq 40 in case of 0.1bar range	3 & 4
	option		10%~90%Vs ratiometric, I ² C, SPI	5
excitation	voltage	Vdc	5 (max. 10)	
	current	mA	1.5 (max. 2)	
power supply (Vs) for option outputs		Vdc	3, ..., 5	
load resistance for ratiometric output		k Ω	> 5	
zero offset		mV	\leq \pm 2	4
accuracy		%fs	\pm 0.25, \pm 0.5 (standard)	6
long-term stability		%fs/year	\leq \pm 0.1, \leq \pm 0.2 in case of ranges < 2bar, or > 250bar	
input resistance		k Ω	5 \pm 3	
output resistance		k Ω	4.5 \pm 1.5	
insulation resistance		M Ω	\geq 100 @250Vdc	
compensated temperature range		$^{\circ}$ C	0~50 (\leq 2bar), -10~+70 (> 2bar)	
operating temperature range		$^{\circ}$ C	-40 ~ +125, -40 ~ +85 in case of option outputs	
storage temperature range		$^{\circ}$ C	-40 ~ +125, -40 ~ +85 in case of option outputs	
temperature drift of zero offset		%fso	\leq \pm 0.75 (> 2bar), \leq \pm 0.8 (0.35bar, ..., 2bar), \leq \pm 1.2 (< 0.35bar)	4 & 7
temperature drift of span		%fso	\leq \pm 0.75 (> 2bar), \leq \pm 0.8 (0.35bar, ..., 2bar), \leq \pm 1.2 (< 0.35bar)	4 & 7
life time		cycles	10 ⁸	
response time		ms	\leq 1	8
process connection			G1/4 male, G1/2 male, M20x1.5 male, other threads on request	
connection for electronics housing			M24x1 male, other threads on request	
electrical interface			colored flying wires, silicone rubber, 100mm (standard)	9
			pins	9 & 10
			flexible flat cable, 15mm (available for ratiometric output)	9
pressure diaphragm			316L SS	
thread and housing material			316L SS	
filling oil			silicone oil	
net weight		gram	~110	

General conditions for measurements: media temp. = 25°C \pm 1°C, ambient temp. = 25°C \pm 1°C, humidity = 50%RH \pm 5%RH, barometric pressure: 860~1060 mbar, max. vibration = 0.1 g (i.e. 0.98m/s/s).

Notes: 1. For customized pressure ranges, consult BCM.


2. "fs" refers to full scale pressure.
3. Measured at fs, i.e. full scale pressure.
4. Measured at 5Vdc excitation.
5. A PCB board will be attached to the sensor.
6. Accuracy = sqrt (non-linearity² + hysteresis² + repeatability²).

BCM SENSOR TECHNOLOGIES BVBA

Model 101B(c) Pressure Sensors with Customized Housing


- Notes:
7. Calculated as the maximum change of output signal over the compensated temperature range.
 8. Response time for a 0 bar to fs step change, 10% to 90% rise time.
 9. 4 contacts for millivolt output and for I²C and SPI output; 3 contacts for ratiometric and ZACwire output.
 10. In case of millivolt output, the pins are 5 gold-plated copper pins of $\Phi 0.5\text{mm}$ and 13mm length. The configuration and electrical definition of these 5 pins are specified in Electrical Interface.

Wheatstone Bridge Circuit




Electrical interface

4-colored flying wires (FW)

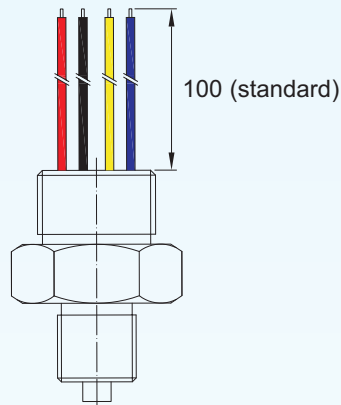

wire color	connection
red	excitation +
black	excitation -
yellow	signal +
blue	signal -

5 pins (PI)

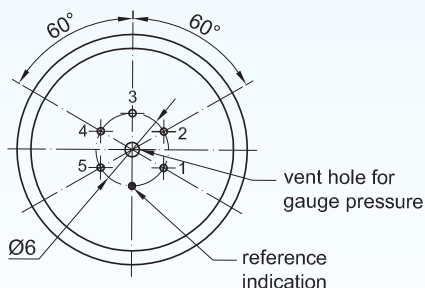

pin	connection
1	excitation +
2	signal +
3	excitation -
4	N.C. ⁽¹⁾
5	signal -

- Notes:
- (1) N.C.: Not connected.
 - (2) All dimensions are in mm.
 - (3) In case of alterations, refer to the label on the package.

BCM SENSOR TECHNOLOGIES BVBA

Model 101B(c) Pressure Sensors with Customized Housing



Ordering Information

position (pos.) 1: model								
101B(c)								
pos. 2: pressure ranges and references								
(-1/0)bar	G	1bar	G, A	16bar	G, A	250bar	A	G: gauge pressure
0.1bar	G	2bar	G, A	20bar	G, A	400bar	A	A: absolute pressure
0.2bar	G	4bar	G, A	35bar	G, A	600bar	S	S: sealed gauge
0.35bar	G	6bar	G, A	70bar	A	1000bar	S	
0.7bar	G, A	10bar	G, A	100bar	A			
Note: In case of the conditioned output signal, indicate both min. and max. measuring pressure, e.g., 0/10bar.								
pos. 3: output signal								
standard: 40mV for range of 0.1bar; 60mV for other ranges								
options: 10%/90%Vs(ratiometric) I ² C SPI								
pos. 4: accuracy								
0.25%fs 0.5%fs (standard)								
pos. 5: compensation								
T1 = 0~50 (≤ 2bar), -10~+70 (> 2bar)								
pos. 6: mechanical interface								
G1/4(m) = G1/4 male thread								
G1/2(m) = G1/2 male thread (standard)								
M20x1.5(m) = M20x1.5 male thread								
other thread types available on request								
pos. 7: electrical interface								
FW (standard): 3 or 4 (#) colored PVC flying wires, length = 100mm (##)								
PI: 3, 4, or 5 (#) pins								
FC (available for ratiometric output): 3-conductor flat cable, length = 15mm (##)								
#: The specific number of conductor refers to note-9 and -10 of Technical Data.								
##: Length can be customized on request.								
pos. 8: excitation (needed only for mV output)								
v = 5Vdc (standard) c = 1.5mA								
pos. 9: customized specifications								
“(*)” is necessary only if any customized parameter is required, otherwise it is neglectable.								
pos.1	pos. 2	pos. 3	pos. 4	pos. 5	pos. 6	pos. 7	pos. 8	pos. 9

Examples of Ordering Code

- standard sensor:
101B(c)-10barG-60mV-0.5%fs-T1-G1/2(m)-4F-v
- customized sensor:
101B(c)-0/15barG-10%/90%Vs-0.5%fs-T1-NPT1/4(m)-3F(50mm)-(*)
(*): - Customized pressure range = 0~15barG;
- Customized mechanical interface = 1/4" NPT male thread.

The listed dimensions, specifications and ordering information are subject to change without prior notice.

BCM SENSOR TECHNOLOGIES BVBA

