


### Outline Drawing

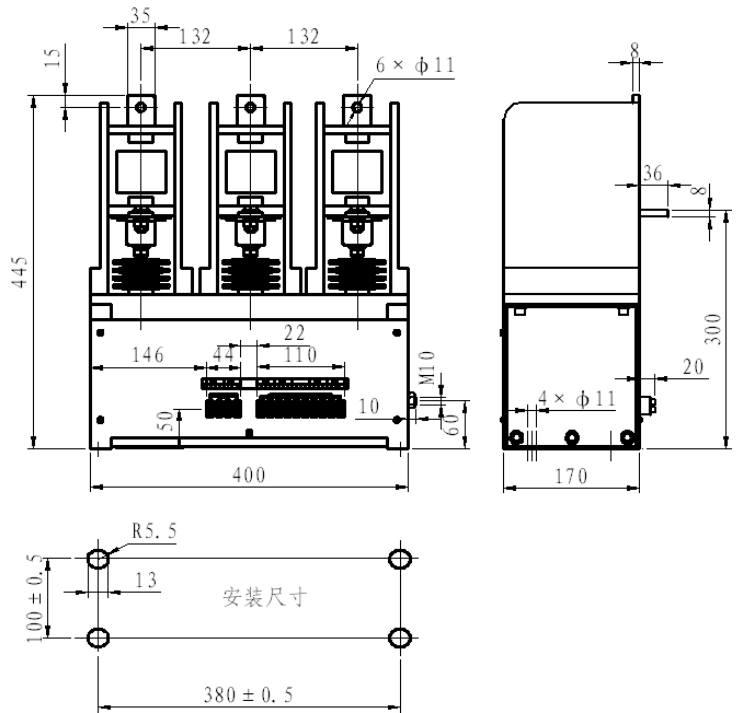

### CKG4-630A/7.2kV AC Vacuum Contactor (Electrical Latching)

Technical Parameters		
Rated Voltage	kV	7.2
Rated Current	A	630
Rated Making Capacity	A/100 Times	6300
Rated Breaking Capacity	A/25 Times	5000
Limited Breaking Capacity	A/3 Times	6300
Rated short time withstand current (2S)	kA	6300
Rated peak withstand current	A	15750
Mechanical Life	Times	5 × 10 <sup>5</sup>
Electrical Life	Times	1 × 10 <sup>5</sup>
Weight	kg	25
Control Power Voltage	V (AC/DC)	110、220
Pick-up Power	W (transient)	1000
Hold Power	W	130
Auxiliary Contact		3 pairs NO, 2 pairs NC

5X FYgg GH(% 'Gi | | i' FcUž?i bg\Ubž>| Ub| gi' Df c| bWž7\| bU KYV. www. glvac. cca ..... 9! aU] ` . e-sales@glvac. cn  
 H@+86 (512) 57735621 ..... : 5L Ž86 (512) 57777020 N| d' 7cXY. 215316