

HS-100 Accelerometer


AC acceleration output via 2 Pin MS Connector

Key Features


- Most common seller
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical, Wind

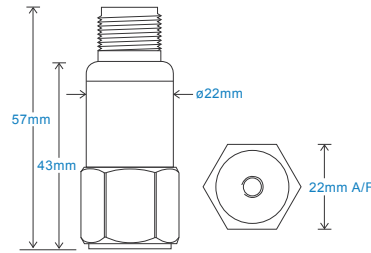

Connection Details



Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Screened Cable Assembly	see: www.hansfordsensors.com for options
Connector	HS-AA004 - non-booted HS-AA053 or HS-0054 - booted
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-55 to 140°C
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

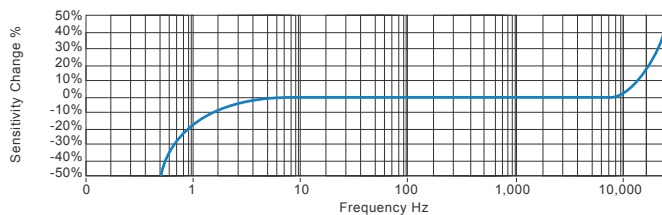

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix HS - Hansford Sensors	Product Series 100 - Industrial Vibration Sensor										
H	S	1	0	0	X	X	X	X	X	X	X
Extra Options (If required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads	
F - Filtered		010 - 10mV/g		$\pm 800\text{g}$		34kHz (2,040kcpm)		01 - PUR		01 - 1/4-28" UNF Female	
I - Intrinsically Safe		030 - 30mV/g		$\pm 250\text{g}$		33kHz (1,980kcpm)		02 - Braided		02 - 1/4-28" UNF Male	
L - 316L Stainless Steel		050 - 50mV/g		$\pm 160\text{g}$		32kHz (1,920kcpm)		07 - Silicon		05 - Quick Fit Female	
RT - Temperature Output PT100		100 - 100mV/g		$\pm 80\text{g}$		30kHz (1,800kcpm)		08 - Flame Retardant		06 - M6 x 1mm Male	
T - Temperature Output		250 - 250mV/g		$\pm 32\text{g}$		28kHz (1,680kcpm)		50 - 2 Pin MS		08 - M8 x 1.25mm Male	
Y - 5% tolerance on sensitivity		500 - 500mV/g		$\pm 16\text{g}$		26kHz (1,560kcpm)		54 - M12		10 - M10 x 1.5mm Male	

HS-100 Accelerometer



AC acceleration output via M12 Connector

Key Features

- Most common seller
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

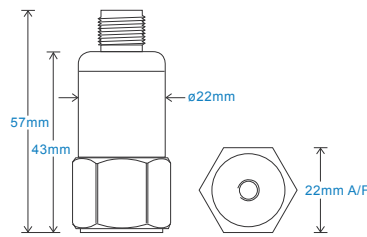

Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Screened Cable Assembly	HS-AC010 - straight HS-AC011 - right angle
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-55 to 140°C
Sealing	IP67
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

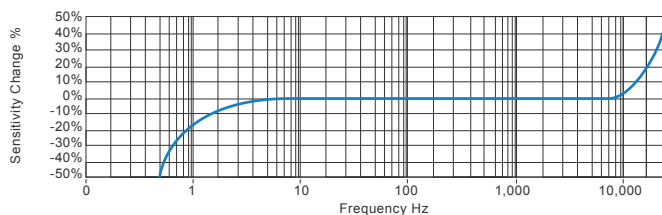

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix	Product Series										
HS - Hansford Sensors	100 - Industrial Vibration Sensor										
H	S	1	0	0	X	X	X	X	X	X	X
Extra Options (if required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads	
F - Filtered		010 - 10mV/g		$\pm 800\text{g}$		34kHz (2,040kcpm)		01 - PUR		01 - 1/4-28" UNF Female	
I - Intrinsically Safe		030 - 30mV/g		$\pm 250\text{g}$		33kHz (1,980kcpm)		02 - Braided		02 - 1/4-28" UNF Male	
L - 316L Stainless Steel		050 - 50mV/g		$\pm 160\text{g}$		32kHz (1,920kcpm)		07 - Silicon		05 - Quick Fit Female	
RT - Temperature Output PT100		100 - 100mV/g		$\pm 80\text{g}$		30kHz (1,800kcpm)		08 - Flame Retardant		06 - M6 x 1mm Male	
T - Temperature Output		250 - 250mV/g		$\pm 32\text{g}$		28kHz (1,680kcpm)		50 - 2 Pin MS		08 - M8 x 1.25mm Male	
Y - 5% tolerance on sensitivity		500 - 500mV/g		$\pm 16\text{g}$		26kHz (1,560kcpm)		54 - M12		10 - M10 x 1.5mm Male	



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS015.7



HS-100 Accelerometer


AC acceleration output via Braided Cable

Key Features


- Most common seller
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical



Connection Details



Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Maximum Cable Length	1000 metres
Standard Cable Length	5 metres
Screened Cable	Braided - length to be specified with order
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-55 to 140°C
Sealing	IP65
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

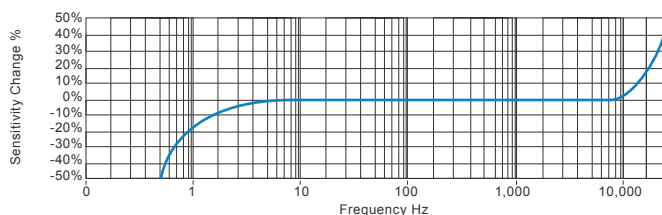

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix HS - Hansford Sensors	Product Series 100 - Industrial Vibration Sensor	Cable Length QXX - length specified in metres
H	S	1
0	0	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X

Extra Options (if required)	Sensitivity	Range	Resonant Frequency	Cable/Connector	Mounting Threads
F - Filtered	010 - 10mV/g	$\pm 800\text{g}$	34kHz (2,040kcpm)	01 - PUR	01 - 1/4-28" UNF Female
I - Intrinsically Safe	030 - 30mV/g	$\pm 250\text{g}$	33kHz (1,980kcpm)	02 - Braided	02 - 1/4-28" UNF Male
L - 316L Stainless Steel	050 - 50mV/g	$\pm 160\text{g}$	32kHz (1,920kcpm)	07 - Silicon	05 - Quick Fit Female
RT - Temperature Output PT100	100 - 100mV/g	$\pm 80\text{g}$	30kHz (1,800kcpm)	08 - Flame Retardant	06 - M6 x 1mm Male
T - Temperature Output	250 - 250mV/g	$\pm 32\text{g}$	28kHz (1,680kcpm)	50 - 2 Pin MS	08 - M8 x 1.25mm Male
Y - 5% tolerance on sensitivity	500 - 500mV/g	$\pm 16\text{g}$	26kHz (1,560kcpm)	54 - M12	10 - M10 x 1.5mm Male



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS003.8




HS-100 Accelerometer

Key Features


- Low smoke, halogen free cable
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical




Connection Details



Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$	Maximum Cable Length	1000 metres
	0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Standard Cable Length	5 metres
Isolation	Base isolated	Screened Cable	Flame Retardant - length to be specified with order
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Transverse Sensitivity	Less than 5%		

Electrical		Environmental	
Excitation Voltage:	18-30Volts DC	Operating Temperature Range	-40 to 100°C
Electrical Noise	0.1mg max	Sealing	IP65
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		


Typical Frequency Response (at 100mV/g)

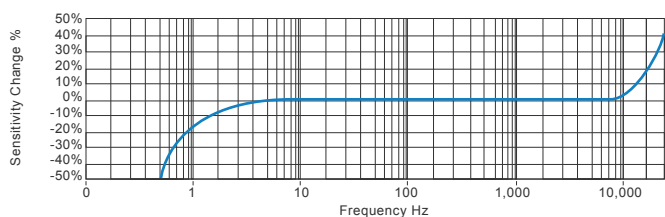

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix		Product Series					Cable Length							
HS - Hansford Sensors		100 - Industrial Vibration Sensor					QXX - length specified in metres							
H	S	1	0	0	X	X	X	X	X	X	X	X	X	X
Extra Options (if required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads				
F - Filtered		010 - 10mV/g		±800g		34kHz (2,040kcpm)		01 - PUR		01 - ¼-28" UNF Female				
I - Intrinsically Safe		030 - 30mV/g		±250g		33kHz (1,980kcpm)		02 - Braided		02 - ¼-28" UNF Male				
L - 316L Stainless Steel		050 - 50mV/g		±160g		32kHz (1,920kcpm)		07 - Silicon		05 - Quick Fit Female				
RT - Temperature Output PT100		100 - 100mV/g		±80g		30kHz (1,800kcpm)		08 - Flame Retardant		06 - M6 x 1mm Male				
T - Temperature Output		250 - 250mV/g		±32g		28kHz (1,680kcpm)		50 - 2 Pin MS		08 - M8 x 1.25mm Male				
Y - 5% tolerance on sensitivity		500 - 500mV/g		±16g		26kHz (1,560kcpm)		54 - M12		10 - M10 x 1.5mm Male				



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS060.7




AC acceleration output via Silicon Cable

Key Features

- Most common seller
- For use with data collector
- Customisable features

Industries


Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

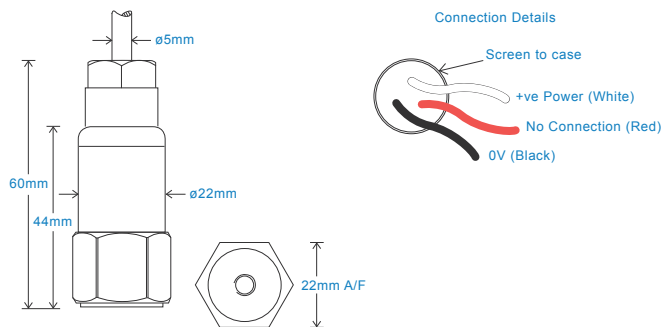

Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$	Maximum Cable Length	1000 metres
	0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Standard Cable Length	5 metres
Isolation	Base isolated	Screened Cable	Silicon - length to be specified with order
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Transverse Sensitivity	Less than 5%	Submersible Depth	100 metres max (10 bar)

Electrical		Environmental	
Excitation Voltage:	18-30Volts DC	Operating Temperature Range	-50 to 140°C
Electrical Noise	0.1mg max	Sealing	IP68
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		


Typical Frequency Response (at 100mV/g)

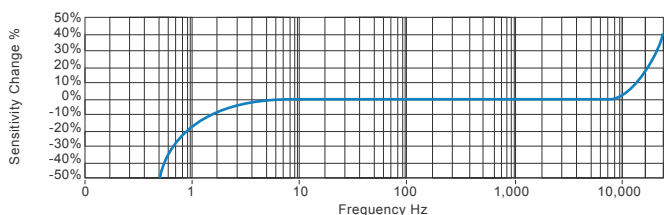

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix HS - Hansford Sensors		Product Series 100 - Industrial Vibration Sensor					Cable Length QXX - length specified in metres							
H	S	1	0	0	X	X	X	X	X	X	X	X	X	X
Extra Options (if required) F - Filtered I - Intrinsically Safe L - 316L Stainless Steel RT - Temperature Output PT100 T - Temperature Output Y - 5% tolerance on sensitivity			Sensitivity 010 - 10mV/g 030 - 30mV/g 050 - 50mV/g 100 - 100mV/g 250 - 250mV/g 500 - 500mV/g		Range ±800g ±250g ±160g ±80g ±32g ±16g		Resonant Frequency 34kHz (2,040kcpm) 33kHz (1,980kcpm) 32kHz (1,920kcpm) 30kHz (1,800kcpm) 28kHz (1,680kcpm) 26kHz (1,560kcpm)			Cable/Connector 01 - PUR 02 - Braided 07 - Silicon 08 - Flame Retardant 50 - 2 Pin MS 54 - M12			Mounting Threads 01 - ¼-28" UNF Female 02 - ¼-28" UNF Male 05 - Quick Fit Female 08 - M6 x 1mm Male 08 - M8 x 1.25mm Male 10 - M10 x 1.5mm Male	



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS005.9





AC acceleration output via PUR Cable

Key Features

- Most common seller
- For use with data collector
- Customisable features

Industries


Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

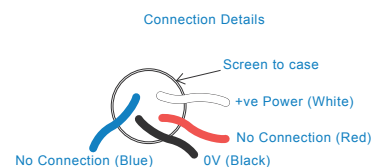

Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$	Maximum Cable Length	1000 metres
	0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Standard Cable Length	5 metres
Isolation	Base isolated	Screened Cable	PUR - length to be specified with order
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Transverse Sensitivity	Less than 5%	Submersible Depth	100 metres max (10 bar)

Electrical		Environmental	
Excitation Voltage:	18-30Volts DC	Operating Temperature Range	-30 to 90°C
Electrical Noise	0.1mg max	Sealing	IP68
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		


Typical Frequency Response (at 100mV/g)

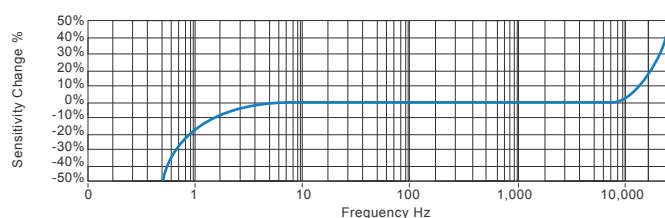

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix		Product Series					Cable Length							
HS - Hansford Sensors		100 - Industrial Vibration Sensor					QXX - length specified in metres							
H	S	1	0	0	X	X	X	X	X	X	X	X	X	X
Extra Options (if required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads				
F - Filtered		010 - 10mV/g		±800g		34kHz (2,040cpm)		01 - PUR		01 - ¼-28" UNF Female				
I - Intrinsically Safe		030 - 30mV/g		±250g		33kHz (1,980cpm)		02 - Braided		02 - ¼-28" UNF Male				
L - 316L Stainless Steel		050 - 50mV/g		±160g		32kHz (1,920cpm)		07 - Silicon		05 - Quick Fit Female				
RT - Temperature Output PT100		100 - 100mV/g		±80g		30kHz (1,800cpm)		08 - Flame Retardant		06 - M6 x 1mm Male				
T - Temperature Output		250 - 250mV/g		±32g		28kHz (1,680cpm)		50 - 2 Pin MS		08 - M8 x 1.25mm Male				
Y - 5% tolerance on sensitivity		500 - 500mV/g		±16g		26kHz (1,560cpm)		54 - M12		10 - M10 x 1.5mm Male				


HS-100 Accelerometer

Key Features

- Resistant to oil
- Protective Conduit
- Premium design

Industries


Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical, Wind

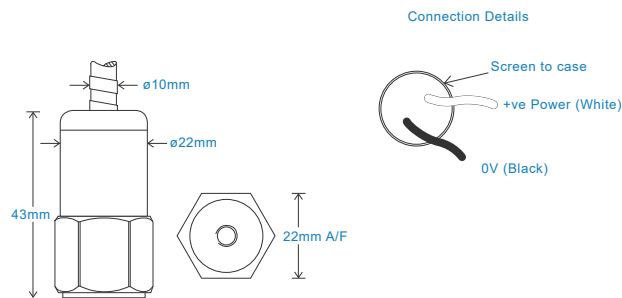

Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$	Screened Cable Assembly	see: www.hansfordsensors.com for options
	0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Maximum Cable Length	1000 metres
Isolation	Base isolated	Standard Cable Length	5 metres
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Transverse Sensitivity	Less than 5%	Conduit Material	316 Stainless Steel
		Conduit Length	Conduit Length is approx. 0.5m shorter than the cable Maximum Conduit Length: 30m

Electrical		Environmental	
Excitation Voltage:	18-30Volts DC	Operating Temperature Range	-55 to 140°C
Electrical Noise	0.1mg max	Sealing	IP65
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		

Typical Frequency Response (at 100mV/g)

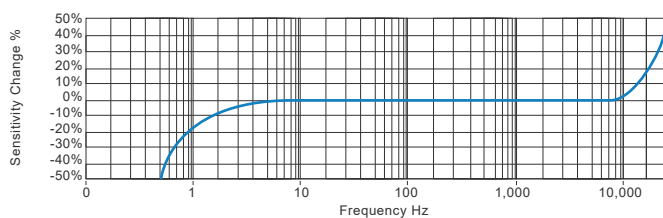

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix HS - Hansford Sensors		Product Series 100 - Industrial Vibration Sensor						Cable Length (if integral cable) QXX - length specified in metres							
H	S	1	0	0	X	X	X	X	X	X	X	X	X	X	X
Extra Options (if required) F - Filtered L - 316L Stainless Steel RT - Temperature Output PT100 S - 90° Side Exit T - Temperature Output Y - 5% tolerance on sensitivity		Sensitivity 010 - 10mV/g 030 - 30mV/g 050 - 50mV/g 100 - 100mV/g 250 - 250mV/g 500 - 500mV/g		Range ±800g ±250g ±160g ±80g ±32g ±16g		Resonant Frequency 27kHz (1,620kcpm) 25kHz (1,500kcpm) 23kHz (1,380kcpm) 21kHz (1,260kcpm) 19kHz (1,140kcpm) 17kHz (1,020kcpm)		Cable/Connector 30C - FEP with Protective Conduit		Mounting Threads 01 - ¼-28" UNF Female 02 - ¼-28" UNF Male 05 - Quick Fit Female 06 - M6 x 1mm Male 08 - M8 x 1.25mm Male 10 - M10 x 1.5mm Male					



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS873.4



HS-100 Accelerometer



AC acceleration output via 4 Core Polyolefin HFFR

Key Features

- Halogen free cable
- Most common seller
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

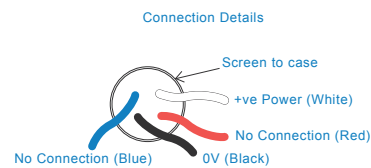

Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$
	Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$
	1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$
	0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Maximum Cable Length	1000 metres
Standard Cable Length	5 metres
Screened Cable	Polyolefin HFFR - length to be specified with order
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	>10 ⁸ Ohms at 500 Volts

Environmental

Operating Temperature Range	-55 to 130°C
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

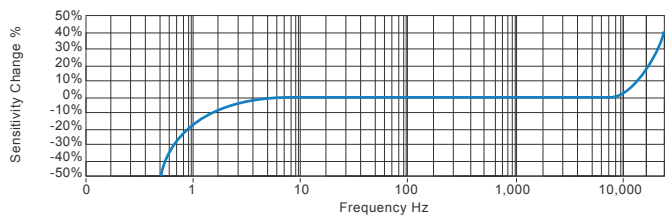

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix		Product Series				Cable Length								
HS - Hansford Sensors		100 - Industrial Vibration Sensor				QXX - length specified in metres								
H	S	1	0	0	X	X	X	X	X	X	X	X	X	X
Extra Options (if required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads				
F - Filtered		010 - 10mV/g		±800g		34kHz (2,040kcpm)		37 - 4 Core Polyolefin		01 - ¼-28" UNF Female				
L - 316L Stainless Steel		030 - 30mV/g		±250g		33kHz (1,980kcpm)		HFFR		02 - ¼-28" UNF Male				
RT - Temperature Output PT100		050 - 50mV/g		±160g		32kHz (1,920kcpm)				05 - Quick Fit Female				
T - Temperature Output		100 - 100mV/g		±80g		30kHz (1,800kcpm)				06 - M6 x 1mm Male				
Y - 5% tolerance on sensitivity		250 - 250mV/g		±32g		28kHz (1,680kcpm)				08 - M8 x 1.25mm Male				
		500 - 500mV/g		±16g		26kHz (1,560kcpm)				10 - M10 x 1.5mm Male				



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS1072



HS-100T Accelerometer


AC acceleration and temperature output via 3 Pin MS Connector

Key Features

- Temperature output
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical, Wind

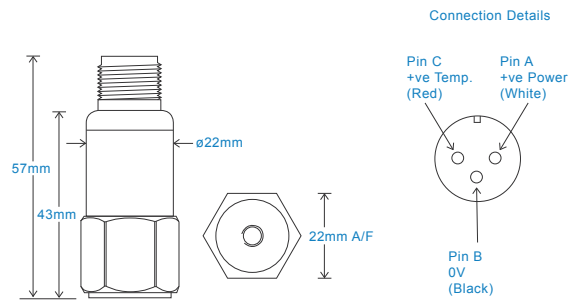

Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Temperature Output	10 mV/°C standard 100°C - Option 140°C
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Screened Cable Assembly	see: www.hansfordsensors.com for options
Connector	HS-AA004 - non-booted HS-AA053 or HS-0054 - booted
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-55 to 140°C
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

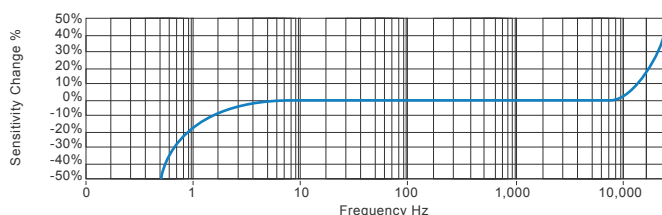

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix HS - Hansford Sensors	Product Series 100 - Industrial Vibration Sensor										
H	S	1	0	0	T	X	X	X	X	X	X
Extra Options (If required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads	
F - Filtered		010 - 10mV/g		$\pm 800\text{g}$		34kHz (2,040kcpm)		01 - PUR		01 - 1/4-28" UNF Female	
I - Intrinsically Safe		030 - 30mV/g		$\pm 250\text{g}$		33kHz (1,980kcpm)		03 - Braided		02 - 1/4-28" UNF Male	
L - 316L Stainless Steel		050 - 50mV/g		$\pm 160\text{g}$		32kHz (1,920kcpm)		07 - Silicon		05 - Quick Fit Female	
RT - Temperature Output PT100		100 - 100mV/g		$\pm 80\text{g}$		30kHz (1,800kcpm)		08 - Flame Retardant		06 - M6 x 1mm Male	
T - Temperature Output		250 - 250mV/g		$\pm 32\text{g}$		28kHz (1,680kcpm)		52 - 3 Pin MS		08 - M8 x 1.25mm Male	
Y - 5% tolerance on sensitivity		500 - 500mV/g		$\pm 16\text{g}$		26kHz (1,560kcpm)		54 - M12		10 - M10 x 1.5mm Male	



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS006.9



HS-100T Accelerometer


AC acceleration and temperature output via M12 Connector

Key Features


- Temperature output
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

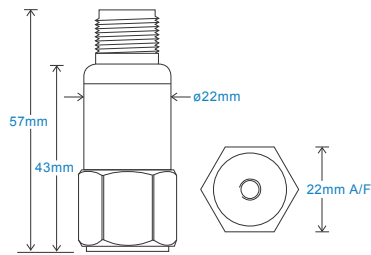

Connection Details



Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Temperature Output	10 mV/°C standard 100°C - Option 140°C
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Screened Cable Assembly	HS-AC010 - straight HS-AC011 - right angle
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-55 to 140°C
Sealing	IP67
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

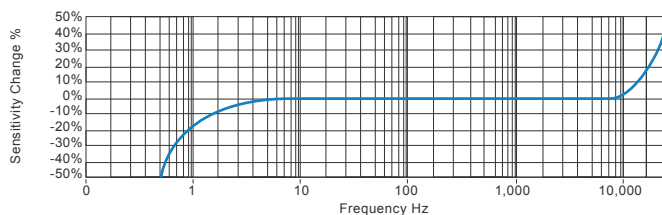

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix	Product Series										
HS - Hansford Sensors	100 - Industrial Vibration Sensor										
H	S	1	0	0	T	X	X	X	X	X	X
Extra Options (if required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads	
F - Filtered		010 - 10mV/g		$\pm 800\text{g}$		34kHz (2,040kcpm)		01 - PUR		01 - 1/4-28" UNF Female	
I - Intrinsically Safe		030 - 30mV/g		$\pm 250\text{g}$		33kHz (1,980kcpm)		03 - Braided		02 - 1/4-28" UNF Male	
L - 316L Stainless Steel		050 - 50mV/g		$\pm 160\text{g}$		32kHz (1,920kcpm)		07 - Silicon		05 - Quick Fit Female	
S - 90° Side Exit		100 - 100mV/g		$\pm 80\text{g}$		30kHz (1,800kcpm)		15 - Flame Retardant		06 - M6 x 1mm Male	
T - Temperature Output		250 - 250mV/g		$\pm 32\text{g}$		28kHz (1,680kcpm)		52 - 3 Pin MS		08 - M8 x 1.25mm Male	
Y - 5% tolerance on sensitivity		500 - 500mV/g		$\pm 16\text{g}$		26kHz (1,650kcpm)		54 - M12		10 - M10 x 1.5mm Male	

HS-100T Accelerometer



AC acceleration and temperature output via Braided Cable

Key Features

- Temperature output
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical



Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Temperature Output	Less than 5%
Transverse Sensitivity	

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Maximum Cable Length	1000 metres
Standard Cable Length	5 metres
Screened Cable	Braided - length to be specified with order
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-55 to 140°C
Sealing	IP65
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

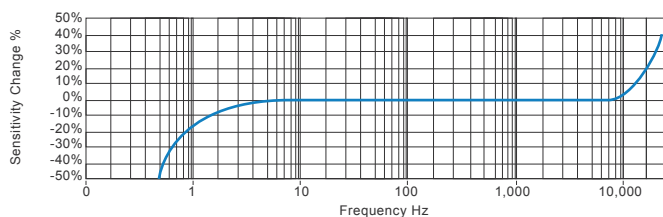

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix HS - Hansford Sensors	Product Series 100 - Industrial Vibration Sensor	Cable Length (if integral cable) QXX - length specified in metres												
H	S	1	0	0	T	X	X	X	X	X	X	X	X	X
Extra Options (if required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads				
F - Filtered		010 - 10mV/g		$\pm 800\text{g}$		28kHz (1,680kcpm)		01 - PUR		01 - 1/4-28" UNF Female				
I - Intrinsically Safe		030 - 30mV/g		$\pm 250\text{g}$		26kHz (1,560kcpm)		03 - Braided		02 - 1/4-28" UNF Male				
L - 316L Stainless Steel		050 - 50mV/g		$\pm 160\text{g}$		24kHz (1,440kcpm)		07 - Silicon		05 - Quick Fit Female				
S - 90° Side Exit		100 - 100mV/g		$\pm 80\text{g}$		22kHz (1,320kcpm)		15 - Flame Retardant		06 - M6 x 1mm Male				
T - Temperature Output		250 - 250mV/g		$\pm 32\text{g}$		20kHz (1,200kcpm)		52 - 3 Pin MS		08 - M8 x 1.25mm Male				
Y - 5% tolerance on sensitivity		500 - 500mV/g		$\pm 16\text{g}$		18kHz (1,080kcpm)		54 - M12		10 - M10 x 1.5mm Male				

HS-100T Accelerometer



AC acceleration and temperature output via Silicon Cable

Key Features

- Temperature output
- For use with data collector
- Waterproof

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

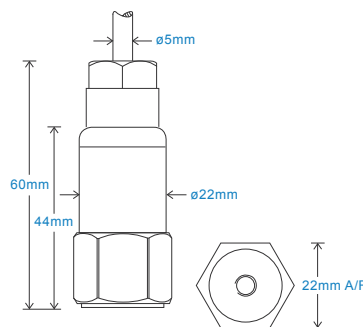

Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Temperature Output	10 mV/°C standard 100°C - Option 140°C
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Maximum Cable Length	1000 metres
Standard Cable Length	5 metres
Screened Cable	Silicon - length to be specified with order
Mounting Threads	see: 'How To Order' table
Submersible Depth	100 metres max. (10 bar)


Electrical

Excitation Voltage	18-30 Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-50 to 140°C
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

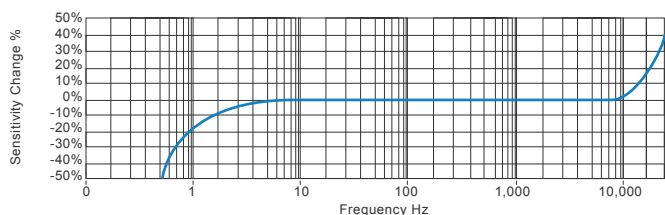

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix HS - Hansford Sensors	Product Series 100 - Industrial Vibration Sensor	Cable Length QXX - length specified in metres
H	S	1
0	0	T
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X
X	X	X

Extra Options (if required) F - Filtered I - Intrinsically Safe L - 316L Stainless Steel S - 90° Side Exit T - Temperature Output Y - 5% tolerance on sensitivity	Sensitivity 010 - 10mV/g 030 - 30mV/g 050 - 50mV/g 100 - 100mV/g 250 - 250mV/g 500 - 500mV/g	Range $\pm 800\text{g}$ $\pm 250\text{g}$ $\pm 160\text{g}$ $\pm 80\text{g}$ $\pm 32\text{g}$ $\pm 16\text{g}$	Resonant Frequency 34kHz (2,040kcpm) 33kHz (1,980kcpm) 32kHz (1,920kcpm) 30kHz (1,800kcpm) 28kHz (1,680kcpm) 26kHz (1,560kcpm)	Cable/Connector 01 - PUR 03 - Braided 07 - Silicon 15 - Flame Retardant 52 - 3 Pin MS 54 - M12	Mounting Threads 01 - 1/4-28" UNF Female 02 - 1/4-28" UNF Male 05 - Quick Fit Female 06 - M6 x 1mm Male 08 - M8 x 1.25mm Male 10 - M10 x 1.5mm Male
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS045.8





AC acceleration and temperature output via PUR Cable

Key Features

- Temperature output
- For use with data collector
- Waterproof
- Resistant to oil

Industries


Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

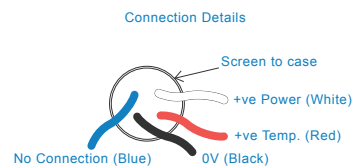

Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$	Maxiumum Cable Length	1000 metres
	0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Standard Cable Length	5 metres
Isolation	Base isolated	Screened Cable	PUR - length to be specified with order
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Temperature Output	10 mV/°C standard 90°C	Submersible Depth	100 metres max. (10 bar)
Transverse Sensitivity	Less than 5%		

Electrical		Environmental	
Excitation Voltage	18-30 Volts DC	Operating Temperature Range	-30 to 90°C
Electrical Noise	0.1mg max	Sealing	IP68
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		


Typical Frequency Response (at 100mV/g)

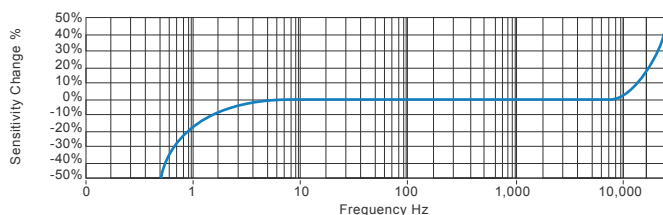

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix HS - Hansford Sensors		Product Series 100 - Industrial Vibration Sensor				Cable Length QXX - length specified in metres									
H S		1 0 0 T				X X X X X X X X X X									
Extra Options (if required) F - Filtered I - Intrinsically Safe L - 316L Stainless Steel S - 90° Side Exit T - Temperature Output Y - 5% tolerance on sensitivity		Sensitivity 010 - 10mV/g 030 - 30mV/g 050 - 50mV/g 100 - 100mV/g 250 - 250mV/g 500 - 500mV/g		Range ±800g ±250g ±160g ±80g ±32g ±16g		Resonant Frequency 34kHz (2,040kcpm) 33kHz (1,980kcpm) 32kHz (1,920kcpm) 30kHz (1,800kcpm) 28kHz (1,680kcpm) 26kHz (1,560kcpm)				Cable/Connector 01 - PUR 03 - Braided 07 - Silicon 15 - Flame Retardant 52 - 3 Pin MS 54 - M12				Mounting Threads 01 - ¼-28" UNF Female 02 - ¼-28" UNF Male 05 - Quick Fit Female 06 - M6 x 1mm Male 08 - M8 x 1.25mm Male 10 - M10 x 1.5mm Male	



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS190.6





AC acceleration and temperature output via Flame Retardant Cable

Key Features

- Temperature output
- Low smoke, halogen free cable
- For use with data collector

Industries


Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical



Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$	Maximum Cable Length	1000 metres
	0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Standard Cable Length	5 metres
Isolation	Base isolated	Screened Cable	Flame Retardant - length to be specified with order
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Temperature Output	10 mV/°C standard 100°C - Option 140°C		
Transverse Sensitivity	Less than 5%		

Electrical		Environmental	
Excitation Voltage	18-30 Volts DC	Operating Temperature Range	-40 to 100°C
Electrical Noise	0.5mA to 8mA	Sealing	IP65
Current Range	10 - 12 Volts DC	Maximum Shock	5000g
Bias Voltage	2 seconds	EMC	EN61326-1:2013
Settling Time	200 Ohms max.		
Output Impedance	>10 ⁸ Ohms at 500 Volts		
Case Isolation			


Typical Frequency Response (at 100mV/g)

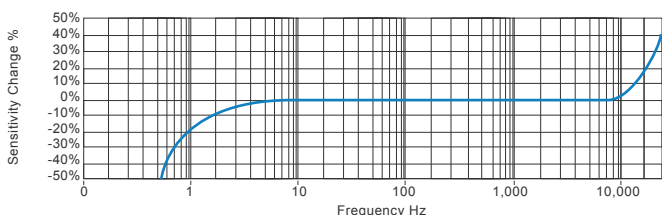

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix
HS - Hansford Sensors

Product Series
100 - Industrial Vibration Sensor

Cable Length
QXX - length specified in metres

Character	Description
H	Extra Options (if required)
S	Sensitivity
1	Range
0	Resonant Frequency
0	Cable/Connector
T	Mounting Threads
X	Cable Length

Extra Options (if required)
F - Filtered
I - Intrinsically Safe
L - 316L Stainless Steel
S - 90° Side Exit
T - Temperature Output
Y - 5% tolerance on sensitivity

Sensitivity
010 - 10mV/g
030 - 30mV/g
050 - 50mV/g
100 - 100mV/g
250 - 250mV/g
500 - 500mV/g

Range
±800g
±250g
±160g
±80g
±32g
±16g

Resonant Frequency
34kHz (2,040kcpm)
33kHz (1,980kcpm)
32kHz (1,920kcpm)
30kHz (1,800kcpm)
28kHz (1,680kcpm)
26kHz (1,560kcpm)

Cable/Connector
01 - PUR
03 - Braided
07 - Silicon
15 - Flame Retardant
52 - 3 Pin MS
54 - M12


Mounting Threads
01 - ¼-28" UNF Female
02 - ½-28" UNF Male
05 - Quick Fit Female
06 - M6 x 1mm Male
08 - M8 x 1.25mm Male
10 - M10 x 1.5mm Male



AC acceleration and PT100 temperature output via M12 Connector

- For use with data collector
- Temperature output PT100
- Customisable features

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

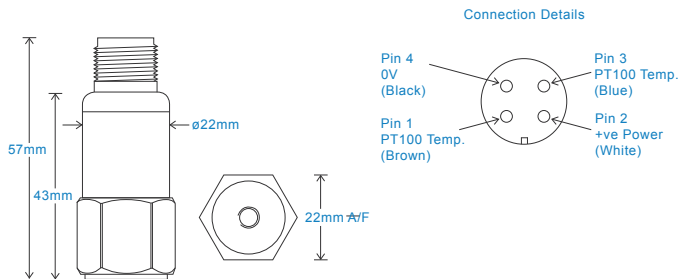

CE





AC acceleration and PT100 temperature output via PUR Cable

Key Features

- Temperature output PT100
- Waterproof
- Resistant to oil

Industries


Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

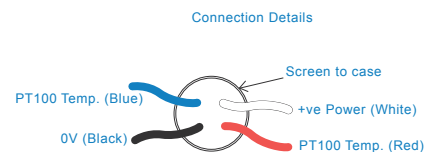

Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$	Maximum Cable Length	1000 metres
	0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Standard Cable Length	5 metres
Isolation	Base isolated	Screened Cable	PUR - length to be specified with order
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Temperature Output	PT100 (100 Ohms)	Submersible Depth	100 metres max (10 bar)
Transverse Sensitivity	Less than 5%		

Electrical		Environmental	
Excitation Voltage	18-30 Volts DC	Operating Temperature Range	-30 to 90°C
Electrical Noise	0.1mg max	Sealing	IP68
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		


Typical Frequency Response (at 100mV/g)

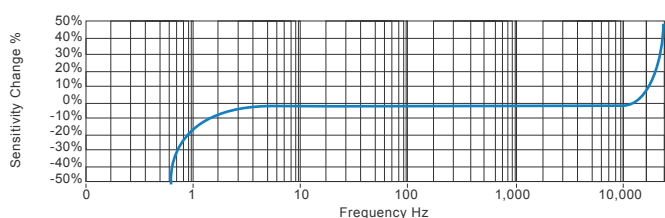

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix		Product Series				Cable Length								
HS - Hansford Sensors		100 - Industrial Vibration Sensor				QXX - length specified in metres								
H	S	1	0	0	R	T	X	X	X	X	X	X	X	X
Extra Options (if required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads				
F - Filtered		010 - 10mV/g		±800g		34kHz (2,040kcpm)		01 - PUR		01 - ¼-28" UNF Female				
I - Intrinsically Safe		030 - 30mV/g		±250g		33kHz (1,980kcpm)		54 - M12		02 - ¼-28" UNF Male				
L - 316L Stainless Steel		050 - 50mV/g		±160g		32kHz (1,920kcpm)				05 - Quick Fit Female				
RT - Temperature Output PT100		100 - 100mV/g		±80g		30kHz (1,800kcpm)				06 - M6 x 1mm Male				
S - 90° Side Exit		250 - 250mV/g		±32g		28kHz (1,680kcpm)				08 - M8 x 1.25mm Male				
Y - 5% Tolerance on sensitivity		500 - 500mV/g		±16g		26kHz (1,560kcpm)				10 - M10 x 1.5mm Male				



AC acceleration and PT100 temperature output via PUR Cable

Key Features

- Temperature output PT100
- Filtered output
- Waterproof and resistant to oil

Industries


Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

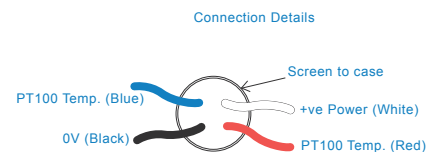

Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$	Maximum Cable Length	1000 metres
	0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Standard Cable Length	5 metres
Isolation	Base isolated	Screened Cable	PUR - length to be specified with order
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Temperature Output	PT100 (100 Ohms)	Submersible Depth	100 metres max (10 bar)
Transverse Sensitivity	Less than 5%		

Electrical		Environmental	
Excitation Voltage	18-30 Volts DC	Operating Temperature Range	-30 to 90°C
Electrical Noise	0.1mg max	Sealing	IP68
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		


Typical Frequency Response (at 100mV/g)

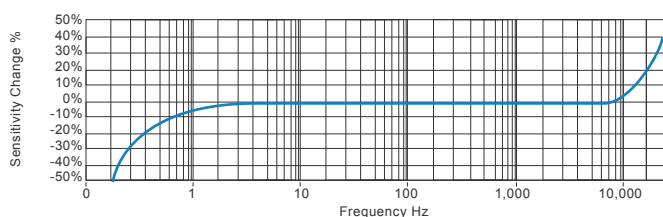

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix
HS - Hansford Sensors

Product Series
100 - Industrial Vibration Sensor

Product Options
F - Filtered
L - 316L Stainless Steel
RT - Temperature Output PT100
S - 90° Side Exit
Y - 5% tolerance on sensitivity

Sensitivity
010 - 10mV/g
030 - 30mV/g
050 - 50mV/g
100 - 100mV/g
250 - 250mV/g
500 - 500mV/g

Range
±800g
±250g
±160g
±80g
±32g
±16g

Resonant Frequency
28Hz (1,680kcpm)
26kHz (1,560kcpm)
24kHz (1,440kcpm)
22kHz (1,320kcpm)
20kHz (1,200kcpm)
18kHz (1,080kcpm)

Cable/Connector
01 - PUR
54 - M12

Mounting Threads
01 - ¼-28" UNF Female
02 - ¼-28" UNF Male
05 - Quick Fit Female
06 - M6 x 1mm Male
08 - M8 x 1.25mm Male
10 - M10 x 1.5mm Male

Cable Length
QXX - length specified in metres

HS-100F Accelerometer


AC acceleration output via 2 Pin MS Connector

Key Features


- Most common seller
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical, Wind

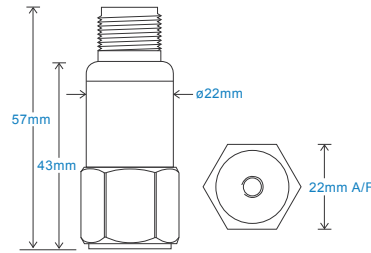

Connection Details



Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$ 0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Screened Cable Assembly	see: www.hansfordsensors.com for options
Connector	HS-AA004 - non-booted HS-AA053 or HS-0054 - booted
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-55 to 140°C
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

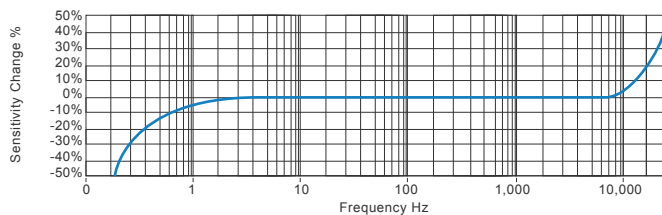

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix HS - Hansford Sensors	Product Series 100 - Industrial Vibration Sensor										
H	S	1	0	0	F	X	X	X	X	X	X
Extra Options (If required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads	
F - Filtered		010 - 10mV/g		$\pm 800\text{g}$		28kHz (1,680kcpm)		01 - PUR		01 - 1/4-28" UNF Female	
I - Intrinsically Safe		030 - 30mV/g		$\pm 250\text{g}$		26kHz (1,560kcpm)		02 - Braided		02 - 1/4-28" UNF Male	
L - 316L Stainless Steel		050 - 50mV/g		$\pm 160\text{g}$		24kHz (1,440kcpm)		07 - Silicon		05 - Quick Fit Female	
RT - Temperature Output PT100		100 - 100mV/g		$\pm 80\text{g}$		22kHz (1,320kcpm)		08 - Flame Retardant		06 - M6 x 1mm Male	
T - Temperature Output		250 - 250mV/g		$\pm 32\text{g}$		20kHz (1,200kcpm)		50 - 2 Pin MS		08 - M8 x 1.25mm Male	
Y - 5% tolerance on sensitivity		500 - 500mV/g		$\pm 16\text{g}$		18kHz (1,080kcpm)		54 - M12		10 - M10 x 1.5mm Male	



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS124.7



HS-100F Accelerometer



AC acceleration output via M12 Connector

Key Features

- Most common seller
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

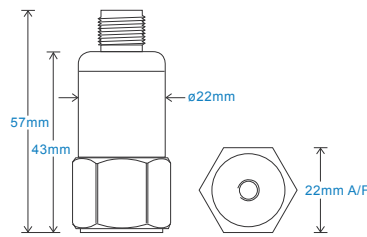

Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$ 0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Screened Cable Assembly	HS-AC010 - straight HS-AC011 - right angle
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-55 to 140°C
Sealing	IP67
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

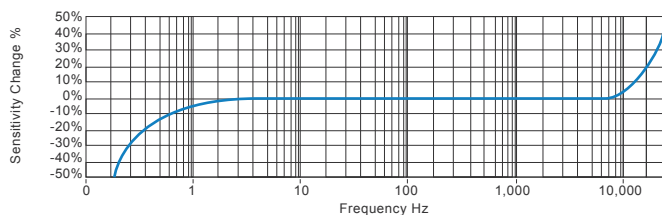

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix	Product Series										
HS - Hansford Sensors	100 - Industrial Vibration Sensor										
H	S	1	0	0	F	X	X	X	X	X	X
Extra Options (if required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads	
F - Filtered		010 - 10mV/g		$\pm 800\text{g}$		28kHz (1,680kcpm)		01 - PUR		01 - 1/4-28" UNF Female	
I - Intrinsically Safe		030 - 30mV/g		$\pm 250\text{g}$		26kHz (1,560kcpm)		02 - Braided		02 - 1/4-28" UNF Male	
L - 316L Stainless Steel		050 - 50mV/g		$\pm 160\text{g}$		24kHz (1,440kcpm)		07 - Silicon		05 - Quick Fit Female	
RT - Temperature Output PT100		100 - 100mV/g		$\pm 80\text{g}$		22kHz (1,320kcpm)		08 - Flame Retardant		06 - M6 x 1mm Male	
T - Temperature Output		250 - 250mV/g		$\pm 32\text{g}$		20kHz (1,200kcpm)		50 - 2 Pin MS		08 - M8 x 1.25mm Male	
Y - 5% tolerance on sensitivity		500 - 500mV/g		$\pm 16\text{g}$		18kHz (1,080kcpm)		54 - M12		10 - M10 x 1.5mm Male	



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS107.5




AC acceleration output via Braided Cable

Key Features


- Most common seller
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical




Connection Details



Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$	Maximum Cable Length	1000 metres
	0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Standard Cable Length	5 metres
Isolation	Base isolated	Screened Cable	Braided - length to be specified with order
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Transverse Sensitivity	Less than 5%		

Electrical		Environmental	
Excitation Voltage:	18-30Volts DC	Operating Temperature Range	-55 to 140°C
Electrical Noise	0.1mg max	Sealing	IP65
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		


Typical Frequency Response (at 100mV/g)

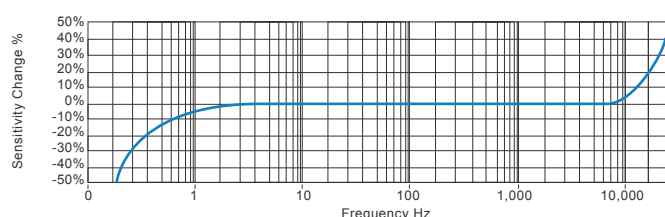

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix		Product Series					Cable Length							
HS - Hansford Sensors		100 - Industrial Vibration Sensor					QXX - length specified in metres							
H	S	1	0	0	F	X	X	X	X	X	X	X	X	X
Extra Options (if required)		Sensitivity		Range		Resonant Frequency		Cable/Connector		Mounting Threads				
F - Filtered		010 - 10mV/g		±800g		28kHz (1,680kcpm)		01 - PUR		01 - ¼-28" UNF Female				
I - Intrinsically Safe		030 - 30mV/g		±250g		26kHz (1,560kcpm)		02 - Braided		02 - ¼-28" UNF Male				
L - 316L Stainless Steel		050 - 50mV/g		±160g		24kHz (1,440kcpm)		07 - Silicon		05 - Quick Fit Female				
RT - Temperature Output PT100		100 - 100mV/g		±80g		22kHz (1,320kcpm)		08 - Flame Retardant		06 - M6 x 1mm Male				
T - Temperature Output		250 - 250mV/g		±32g		20kHz (1,200kcpm)		50 - 2 Pin MS		08 - M8 x 1.25mm Male				
Y - 5% tolerance on sensitivity		500 - 500mV/g		±16g		18kHz (1,080kcpm)		54 - M12		10 - M10 x 1.5mm Male				



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS125.6





AC acceleration output via Silicon Cable

Key Features

- Most common seller
- For use with data collector
- Customisable features

Industries


Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical



Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$	Maximum Cable Length	1000 metres
	0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Standard Cable Length	5 metres
Isolation	Base isolated	Screened Cable	Silicon - length to be specified with order
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Transverse Sensitivity	Less than 5%	Submersible Depth	100 metres max (10 bar)

Electrical		Environmental	
Excitation Voltage:	18-30Volts DC	Operating Temperature Range	-50 to 140°C
Electrical Noise	0.1mg max	Sealing	IP68
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		


Typical Frequency Response (at 100mV/g)

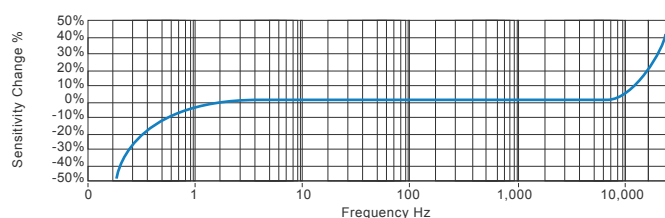

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix		Product Series								Cable Length											
HS - Hansford Sensors		100 - Industrial Vibration Sensor								QXX - length specified in metres											
H	S	1	0	0	F	X	X	X	X	X	X	X	X	X							
Extra Options (if required)						Sensitivity				Range				Resonant Frequency				Cable/Connector		Mounting Threads	
F - Filtered						010 - 10mV/g				±800g				28kHz (1,680kcpm)				01 - PUR		01 - ¼-28" UNF Female	
I - Intrinsically Safe						030 - 30mV/g				±250g				26kHz (1,560kcpm)				02 - Braided		02 - ¼-28" UNF Male	
L - 316L Stainless Steel						050 - 50mV/g				±160g				24kHz (1,440kcpm)				07 - Silicon		05 - Quick Fit Female	
RT - Temperature Output PT100						100 - 100mV/g				±80g				22kHz (1,320kcpm)				08 - Flame Retardant		06 - M6 x 1mm Male	
T - Temperature Output						250 - 250mV/g				±32g				20kHz (1,200kcpm)				50 - 2 Pin MS		08 - M8 x 1.25mm Male	
Y - 5% tolerance on sensitivity						500 - 500mV/g				±16g				18kHz (1,080kcpm)				54 - M12		10 - M10 x 1.5mm Male	



AC acceleration output via PUR Cable

Key Features

- Most common seller
- For use with data collector
- Customisable features

Industries


Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

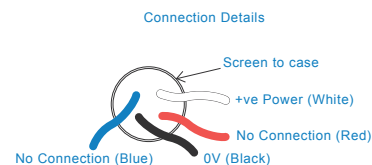

Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$	Maximum Cable Length	1000 metres
	0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Standard Cable Length	5 metres
Isolation	Base isolated	Screened Cable	PUR - length to be specified with order
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Transverse Sensitivity	Less than 5%	Submersible Depth	100 metres max (10 bar)

Electrical		Environmental	
Excitation Voltage:	18-30Volts DC	Operating Temperature Range	-30 to 90°C
Electrical Noise	0.1mg max	Sealing	IP68
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		


Typical Frequency Response (at 100mV/g)

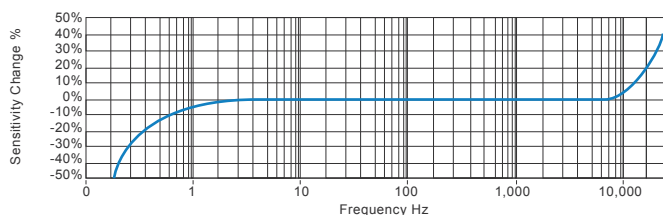

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix
HS - Hansford Sensors

Product Series
100 - Industrial Vibration Sensor

Cable Length
QXX - length specified in metres

Extra Options (if required)
 F - Filtered
 I - Intrinsically Safe
 L - 316L Stainless Steel
 RT - Temperature Output PT100
 T - Temperature Output
 Y - 5% tolerance on sensitivity

Sensitivity
 010 - 10mV/g
 030 - 30mV/g
 050 - 50mV/g
 100 - 100mV/g
 250 - 250mV/g
 500 - 500mV/g

Range
 ±800g
 ±250g
 ±160g
 ±80g
 ±32g
 ±16g

Resonant Frequency
 28kHz (1,680kcpm)
 26kHz (1,560kcpm)
 24kHz (1,440kcpm)
 22kHz (1,320kcpm)
 20kHz (1,200kcpm)
 18kHz (1,080kcpm)

Cable/Connector
 01 - PUR
 02 - Braided
 07 - Silicon
 08 - Flame Retardant
 50 - 2 Pin MS
 54 - M12

Mounting Threads
 01 - ¼-28" UNF Female
 02 - ¼-28" UNF Male
 05 - Quick Fit Female
 06 - M6 x 1mm Male
 08 - M8 x 1.25mm Male
 10 - M10 x 1.5mm Male


AC acceleration output via Flame Retardant Cable

Key Features


- Low smoke, halogen free cable
- For use with data collector
- Customisable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical




Connection Details



Technical Performance		Mechanical	
Mounted Base Resonance	see 'How To Order' table (nominal)	Case Material	Stainless Steel
Sensitivity	see: 'How To Order' table $\pm 10\%$	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$	Weight	106gms (nominal) body only
	0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$	Maximum Cable Length	1000 metres
	0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$	Standard Cable Length	5 metres
Isolation	Base isolated	Screened Cable	Flame Retardant - length to be specified with order
Range	see: 'How To Order' table	Mounting Threads	see: 'How To Order' table
Transverse Sensitivity	Less than 5%		

Electrical		Environmental	
Excitation Voltage:	18-30Volts DC	Operating Temperature Range	-40 to 100°C
Electrical Noise	0.1mg max	Sealing	IP65
Current Range	0.5mA to 8mA	Maximum Shock	5000g
Bias Voltage	10 - 12 Volts DC	EMC	EN61326-1:2013
Settling Time	2 seconds		
Output Impedance	200 Ohms max.		
Case Isolation	>10 ⁸ Ohms at 500 Volts		


Typical Frequency Response (at 100mV/g)

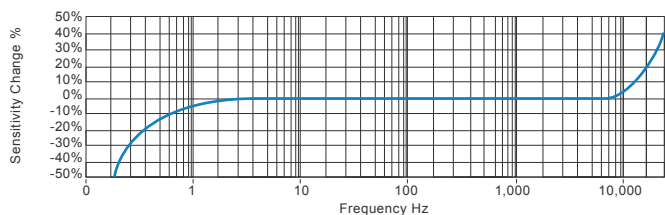

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix		Product Series				Cable Length								
HS - Hansford Sensors		100 - Industrial Vibration Sensor				QXX - length specified in metres								
H	S	1	0	0	F	X	X	X	X	X	X	X	X	X
Extra Options (if required)		Sensitivity		Range		Resonant Frequency		Cable/Connector			Mounting Threads			
F - Filtered		010 - 10mV/g		±800g		28kHz (1,680kcpm)		01 - PUR			01 - ¼-28" UNF Female			
I - Intrinsically Safe		030 - 30mV/g		±250g		26kHz (1,560kcpm)		02 - Braided			02 - ¼-28" UNF Male			
L - 316L Stainless Steel		050 - 50mV/g		±160g		24kHz (1,440kcpm)		07 - Silicon			05 - Quick Fit Female			
RT - Temperature Output PT100		100 - 100mV/g		±80g		22kHz (1,320kcpm)		08 - Flame Retardant			06 - M6 x 1mm Male			
T - Temperature Output		250 - 250mV/g		±32g		20kHz (1,200kcpm)		50 - 2 Pin MS			08 - M8 x 1.25mm Male			
Y - 5% tolerance on sensitivity		500 - 500mV/g		±16g		18kHz (1,080kcpm)		54 - M12			10 - M10 x 1.5mm Male			



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS127.5



HS-100I Intrinsically Safe Accelerometer


AC acceleration output via 2 Pin MS Connector

Key Features


- Intrinsically Safe with European, USA, South African, Korean, Indian and Australian approvals
- For use with data collector

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical



Connection Details



Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Screened Cable Assembly Connector	see: www.hansfordsensors.com for options HS-AA004 - non-booted HS-AA053 or HS-0054 - booted
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	see: attached certification details
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

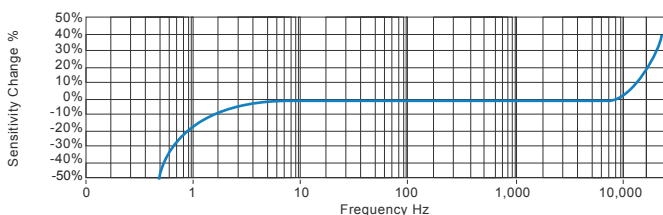

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



Certifications



This product is certified in accordance with
UL 913, 8th Ed. Rev. December 6, 2013
CAN/CSA C22.2 No. 157-92 (R2012) +Upd1 +Upd2



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS035.19



HS-100I Intrinsically Safe Accelerometer

AC acceleration output via 2 Pin MS Connector

Intrinsically Safe Requirements

Maximum Cable Length	See website www.hansfordsensors.com - see attached system drawing	Australian Approval Group I	IECEX ITA 11.0013X Ex ia I Ma (-55°C ≤ Ta ≤ +110°C)
Certificate details: Group I	IECEX BAS07.0037X Baseefa07ATEX0149X ⒺI M1 Ex ia I Ma (-55°C ≤ Ta ≤ +110°C)	US/Canada Approvals Class I, II, III, Division 1, 2, Groups A - G, T4, -55°C to +110°C, IP65 Class I, Zone 0, AEx, ia, IIC, T4, Ga, -55°C to +110°C Zone 20, AEx, ia, IIIC, T130°C, IP65, Da, -55°C to +110°C	Certificate No. USTC/15/FAI/01350
Certificate details: Group II (ignition temperature 130°C)	IECEX BAS07.0035X Baseefa07ATEX0144X ⒺII 1GD Ex ia IIC T4 Ga Ex ia IIIC T130°C IP65 Da (-55°C ≤ Ta ≤ +110°C)	Class I, II, III, Division 1, 2, Groups A - G, T6, -55°C to +60°C Class I, Zone 0, AEx, ia, IIC, T6, Ga, -55°C to +60°C Zone 20, AEx, ia, IIIC, T80°C, IP65, DA, -55°C to +60°C	
Certificate details: Group II (ignition temperature 80°C)	IECEX BAS07.0035X Baseefa07ATEX0144X ⒺII 1GD Ex ia IIC T6 Ga Ex ia IIIC T80°C IP65 Da (-55°C ≤ Ta ≤ +60°C)	South African Approval Korean Approval Group II	Certificate No. MASC S/16-0231X Group II (As Baseefa/ATEX) MASC M/16-0230X Group I (As Baseefa/ATEX) Certificate No 19-AV4BO-0048X Ex ia IIC T6/T4 T6 -55°C < Ta < +60°C T4 -55°C < Ta < +110°C
Accelerometer System Certificate	Baseefa07Y0145 Ex ia IIC T6 (-55°C ≤ Ta ≤ +60°C) Ex ia IIC T4 (-55°C ≤ Ta ≤ +110°C) On request - consult Sales Office	Terminal Parameters Connector	Ui = 28V, li = 93mA, Pi = 0.65W Ci = 1.0nf Li = 0
Terminal Parameters	Ui = 28V, li = 93mA, Pi = 0.65W Ci = 83nf Li/Ri = 15.4µH/Ohm	System Connections	see attached system drawings
500V Isolation	Units Will Pass A 500V Isolation Test	Barrier	1 x Pepperl + Fuchs Galvanic Isolator KFD2-VR4-Ex1.26 (BAS02ATEX7206) see attached system drawings 1 x MTL Zener Barrier MTL7728+ (BAS01ATEX7217) or Pepperl + Fuchs Zener Barrier Z728 (BAS01ATEX7005) or any other barrier that conforms to system drawings on website
Certified Temperature Range	Ex ia IIC T6 Ga (-55°C ≤ Ta ≤ +60°C) (Gas) Ex ia IIIC T80°C IP65 Da (-55°C ≤ Ta ≤ +60°C) (Dust) Ex ia IIC T4 Ga (-55°C ≤ Ta ≤ +110°C) (Gas)* Ex ia IIIC T130°C IP65 Da (-55°C ≤ Ta ≤ +110°C) (Dust)* Ex ia I Ma (-55°C ≤ Ta ≤ +110°C) (Mining) *On request - consult Sales Office	Notes: Special conditions of safe use for Group I & II. The free end of the cable on the integral cable version of the apparatus must be terminated in an appropriate dust-proof enclosure.	

Intrinsically Safe Requirements for IC3 Variations

HS-100IC3 Variation is certified as Category 3 equipment. These sensors are only certified for use within Zones 2.	Certified Temperature Range	Ex ic IIC T4 Gc (-55°C ≤ Ta ≤ +110°C)
	Terminal Parameters	Ui = 25.2V, li = 146mA, Pi = 0.92W Ci = 83nf Li 66µH
Certificate Details: Group II (ignition temperature 130°C)	IECEX BAS17.0054X Baseefa7ATEX0069X eII 3G Ex ic IIC T4 Gc (-55°C ≤ Ta ≤ +110°C)	500V Isolation Units will pass a 500V Isolation Test
	Special Conditions of Use:	The Ci and Li parameters listed on the equipment certificate must be taken into account when connecting this equipment.

How To Order

Product Prefix HS - Hansford Sensors		Product Series 100 - Industrial Vibration Sensor									
H	S	1	0	0	I	X	X	X	X	X	X
Extra Options (if required) A - Australia (Group I) I - Intrinsically Safe (Group II) L - 316L Stainless Steel M - Mining (Group I) S - 90° Side Exit Y - 5% tolerance on sensitivity IC3 - Category 3 Classification				Sensitivity 010 - 10mV/g 030 - 30mV/g 050 - 50mV/g 100 - 100mV/g			Range ±800g ±250g ±160g ±80g	Resonant Frequency 34kHz (2,040kcpm) 33kHz (1,980kcpm) 32kHz (1,920kcpm) 30kHz (1,800kcpm)		Cable/Connector 01 - PUR 02 - Braided 07 - Silicon 50 - 2 Pin MS 54 - M12	Mounting Threads 01 - ¼-28" UNF Female 02 - ¼-28" UNF Male 05 - Quick Fit Female 06 - M6 x 1mm Male 08 - M8 x 1.25mm Male 10 - M10 x 1.5mm Male

HS-100I Intrinsically Safe Accelerometer


AC acceleration output via M12 Connector

Key Features


- Intrinsically Safe with European, USA, South African, Indian, Korean and Australian approvals
- For use with data collector

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical



Connection Details



Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Screened Cable Assembly	HS-AC010 - straight HS-AC011 - right angle
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	see: attached certification details
Sealing	IP67
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

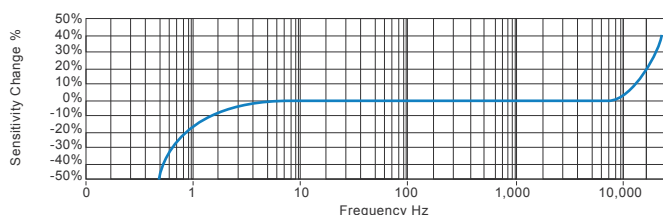

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



Certifications



This product is certified in accordance with
UL 913, 8th Ed. Rev. December 6, 2013
CAN/CSA C22.2 No. 157-92 (R2012) +Upd1 +Upd2



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS036.19



HS-100I Intrinsically Safe Accelerometer

AC acceleration output via M12 Connector

Intrinsically Safe Requirements

Maximum Cable Length	See website www.hansfordsensors.com - see attached system drawing	Australian Approval Group I	IECEX ITA 11.0013X Ex ia I Ma (-55°C ≤ Ta ≤ +110°C)
Certificate details: Group I	IECEX BAS07.0037X Baseefa07ATEX0149X Ⓔ I M1 Ex ia I Ma (-55°C ≤ Ta ≤ +110°C)	US/Canada Approvals Class I, II, III, Division 1, 2, Groups A - G, T4, -55°C to +110°C, IP65 Class I, Zone 0, AEx, ia, IIC, T4, Ga, -55°C to +110°C Zone 20, AEx, ia, IIIC, T130°C, IP65, Da, -55°C to +110°C	Certificate No. USTC/15/FAI/01350
Certificate details: Group II (ignition temperature 130°C)	IECEX BAS07.0035X Baseefa07ATEX0144X Ⓔ II 1GD Ex ia IIC T4 Ga Ex ia IIIC T130°C IP65 Da (-55°C ≤ Ta ≤ +110°C)	Class I, II, III, Division 1, 2, Groups A - G, T6, -55°C to +60°C Class I, Zone 0, AEx, ia, IIC, T6, Ga, -55°C to +60°C Zone 20, AEx, ia, IIIC, T80°C, IP65, DA, -55°C to +60°C	
Certificate details: Group II (ignition temperature 80°C)	IECEX BAS07.0035X Baseefa07ATEX0144X Ⓔ II 1GD Ex ia IIC T6 Ga Ex ia IIIC T80°C IP65 Da (-55°C ≤ Ta ≤ +60°C)	South African Approval Korean Approval Group II	Certificate No. MASC S/16-0231X Group II (As Baseefa/ATEX) MASC M/16-0230X Group I (As Baseefa/ATEX) Certificate No 19-AV4BO-0048X Ex ia IIC T6/T4 T6 -55°C < Ta < +60°C T4 -55°C < Ta < +110°C
Accelerometer System Certificate	Baseefa07Y0145 Ex ia IIC T6 (-55°C ≤ Ta ≤ +60°C) Ex ia IIC T4 (-55°C ≤ Ta ≤ +110°C) On request - consult Sales Office	Terminal Parameters Connector	Ui = 28V, li = 93mA, Pi = 0.65W Ci = 1.0nf Li = 0
Terminal Parameters	Ui = 28V, li = 93mA, Pi = 0.65W Ci = 83nf Li/Ri = 15.4µH/Ohm	System Connections	see attached system drawings
500V Isolation	Units Will Pass A 500V Isolation Test	Barrier	1 x Pepperl + Fuchs Galvanic Isolator KFD2-VR4-Ex1.26 (BAS02ATEX7206) see attached system drawings 1 x MTL Zener Barrier MTL7728+ (BAS01ATEX7217) or Pepperl + Fuchs Zener Barrier Z728 (BAS01ATEX7005) or any other barrier that conforms to system drawings on website
Certified Temperature Range	Ex ia IIC T6 Ga (-55°C ≤ Ta ≤ +60°C) (Gas) Ex ia IIIC T80°C IP65 Da (-55°C ≤ Ta ≤ +60°C) (Dust) Ex ia IIC T4 Ga (-55°C ≤ Ta ≤ +110°C) (Gas)* Ex ia IIIC T130°C IP65 Da (-55°C ≤ Ta ≤ +110°C) (Dust)* Ex ia I Ma (-55°C ≤ Ta ≤ +110°C) (Mining) *On request - consult Sales Office	Notes: Special conditions of safe use for Group I & II. The free end of the cable on the integral cable version of the apparatus must be terminated in an appropriate dust-proof enclosure.	

Intrinsically Safe Requirements for IC3 Variations

HS-100IC3 Variation is certified as Category 3 equipment. These sensors are only certified for use within Zones 2.	Certified Temperature Range	Ex ic IIC T4 Gc (-55°C ≤ Ta ≤ +110°C)
	Terminal Parameters	Ui = 25.2V, li = 146mA, Pi = 0.92W Ci = 83nf Li 66µH
Certificate Details: Group II (ignition temperature 130°C)	IECEX BAS17.0054X Baseefa7ATEX0069X Ⓔ II 3G Ex ic IIC T4 Gc (-55°C ≤ Ta ≤ +110°C)	500V Isolation Units will pass a 500V Isolation Test
	Special Conditions of Use:	The Ci and Li parameters listed on the equipment certificate must be taken into account when connecting this equipment.

How To Order

Product Prefix HS - Hansford Sensors		Product Series 100 - Industrial Vibration Sensor									
H	S	1	0	0	I	X	X	X	X	X	X
Extra Options (if required)			Sensitivity		Range	Resonant Frequency		Cable/Connector		Mounting Threads	
A - Australia (Group I)			010 - 10mV/g		±800g	34kHz (2,040kcpm)		01 - PUR		01 - ¼-28" UNF Female	
I - Intrinsically Safe (Group II)			030 - 30mV/g		±250g	33kHz (1,980kcpm)		02 - Braided		02 - ¼-28" UNF Male	
L - 316L Stainless Steel			050 - 50mV/g		±160g	32kHz (1,920kcpm)		07 - Silicon		05 - Quick Fit Female	
M - Mining (Group I)			100 - 100mV/g		±80g	30kHz (1,800kcpm)		50 - 2 Pin MS		06 - M6 x 1mm Male	
S - 90° Side Exit								54 - M12		08 - M8 x 1.25mm Male	
Y - 5% tolerance on sensitivity										10 - M10 x 1.5mm Male	
IC3 - Category 3 Classification											

HS-100I Intrinsically Safe Accelerometer


AC acceleration output via Braided Cable

Key Features


- Intrinsically Safe with European, USA, South African, Indian, Korean and Australian approvals
- For use with data collector

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical



Connection Details



Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Maximum Cable Length	1000 metres
Standard Cable Length	5 metres
Screened Cable	Braided - length to be specified with order
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	see: attached certification details
Sealing	IP65
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

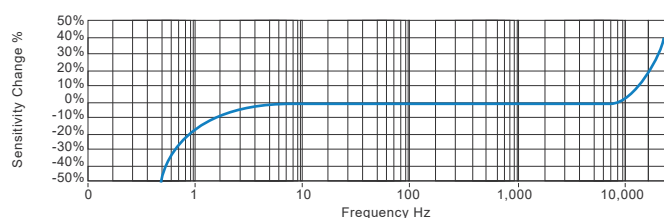

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



Certifications



710318



This product is certified in accordance with
UL 913, 8th Ed. Rev. December 6, 2013
CAN/CSA C22.2 No. 157-92 (R2012) +Upd1 +Upd2



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS037.21



HS-100I Intrinsically Safe Accelerometer

AC acceleration output via Braided Cable

Intrinsically Safe Requirements

Maximum Cable Length	See website www.hansfordsensors.com - see attached system drawing	Australia Approval Group I	IECEX ITA 11.0013X Ex ia I Ma (-55°C ≤ Ta ≤ +110°C)
Certificate details: Group I	IECEX BAS07.0037X Baseefa07ATEX0149X ⓈI M1 Ex ia I Ma (-55°C ≤ Ta ≤ +110°C)	US/Canada Approvals Class I, II, III, Division 1, 2, Groups A - G, T4, -55°C to +110°C, IP65 Class I, Zone 0, AEx, ia, IIC, T4, Ga, -55°C to +110°C Zone 20, AEx, ia, IIC, T130°C, IP65, Da, -55°C to +110°C	Certificate No. USTC/15/FAI/01350
Certificate details: Group II (ignition temperature 130°C)	IECEX BAS07.0035X Baseefa07ATEX0144X ⓈII 1GD Ex ia IIC T4 Ga Ex ia IIC T130°C IP65 Da (-55°C ≤ Ta ≤ +110°C)	Class I, II, III, Division 1, 2, Groups A - G, T6, -55°C to +60°C Class I, Zone 0, AEx, ia, IIC, T6, Ga, -55°C to +60°C Zone 20, AEx, ia, IIC, T80°C, IP65, DA, -55°C to +60°C	
Certificate details: Group II (ignition temperature 80°C)	IECEX BAS07.0035X Baseefa07ATEX0144X ⓈII 1GD Ex ia IIC T6 Ga Ex ia IIC T80°C IP65 Da (-55°C ≤ Ta ≤ +60°C)	South African Approval Korean Approval Group II	Certificate No. MASC S/16-0231X Group II (As Baseefa/ATEX) MASC M/16-0230X Group I (As Baseefa/ATEX) Certificate No 19-AV4BO-0048X Ex ia IIC T6/T4 T6 -55°C < Ta< +60°C T4 -55°C < Ta< +110°C
Accelerometer System Certificate	Baseefa07Y0145 Ex ia IIC T6 (-55°C ≤ Ta ≤ +60°C) Ex ia IIC T4 (-55°C ≤ Ta ≤ +110°C) On request - consult Sales Office	Terminal Parameters 10m of Cable Terminal Parameters 92m of Cable	Ui = 28V, li = 93mA, Pi = 0.65W Ci = 9.9nf Li = 7μF or Li/Ri = 15.4μF/Ohm Ui = 28V, li = 93mA, Pi = 0.65W Ci = 83nf Li/Ri = 15.4μF/Ohm
Terminal Parameters	Ui = 28V, li = 93mA, Pi = 0.65W Ci = 83nf Li/Ri = 15.4μH/Ohm	System Connections	see attached system drawings
500V Isolation	Units Will Pass A 500V Isolation Test	Barrier	1 x Pepperl + Fuchs Galvanic Isolator KFD2-VR4-Ex1.26 (BAS02ATEX7206) see attached system drawings
Certified Temperature Range	Ex ia IIC T6 Ga (-55°C ≤ Ta ≤ +60°C) (Gas) Ex ia IIC T80°C IP65 Da (-55°C ≤ Ta ≤ +60°C) (Dust) Ex ia IIC T4 Ga (-55°C ≤ Ta ≤ +110°C) (Gas)* Ex ia IIC T130°C IP65 Da (-55°C ≤ Ta ≤ +110°C) (Dust)* Ex ia I Ma (-55°C ≤ Ta ≤ +110°C) (Mining) *On request - consult Sales Office	1 x MTL Zener Barrier MTL7728+ (BAS01ATEX7217) or Pepperl + Fuchs Zener Barrier Z728 (BAS01ATEX7005) or any other barrier that conforms to system drawings on website	
Notes: Special conditions of safe use for Group I & II. The free end of the cable on the integral cable version of the apparatus must be terminated in an appropriate dust-proof enclosure.			

Intrinsically Safe Requirements for IC3 Variations

HS-100IC3 Variation is certified as Category 3 equipment. These sensors are only certified for use within Zones 2.	Certified Temperature Range	Ex ic IIC T4 Gc (-55°C ≤ Ta ≤ +110°C)
	Terminal Parameters	Ui = 25.2V, li = 146mA, Pi = 0.92W Ci = 83nf Li 66μH
Certificate Details: Group II (ignition temperature 130°C)	IECEX BAS17.0054X Baseefa7ATEX0069X ⓈII 3G Ex ic IIC T4 Gc (-55°C ≤ Ta ≤ +110°C)	500V Isolation Units will pass a 500V Isolation Test
	Special Conditions of Use:	The Ci and Li parameters listed on the equipment certificate must be taken into account when connecting this equipment.

How To Order

Product Prefix	Product Series								
HS - Hansford Sensors	100 - Industrial Vibration Sensor	H	S	1	0	0	I	X	X
		X	X	X	X	X	X	X	X
Extra Options (if required)	Sensitivity	Range	Resonant Frequency	Cable/Connector	Mounting Threads				
A - Australia (Group I)	010 - 10mV/g	±800g	34kHz (2,040kcpm)	01 - PUR	01 - ¼-28" UNF Female				
I - Intrinsically Safe (Group II)	030 - 30mV/g	±250g	33kHz (1,980kcpm)	02 - Braided	02 - ¼-28" UNF Male				
L - 316L Stainless Steel	050 - 50mV/g	±160g	32kHz (1,920kcpm)	07 - Silicon	05 - Quick Fit Female				
M - Mining (Group I)	100 - 100mV/g	±80g	30kHz (1,800kcpm)	50 - 2 Pin MS	06 - M6 x 1mm Male				
S - 90° Side Exit				54 - M12	08 - M8 x 1.25mm Male				
Y - 5% tolerance on sensitivity					10 - M10 x 1.5mm Male				
IC3 - Category 3 Classification									



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS037.21



HS-100I Intrinsically Safe Accelerometer



AC acceleration output via Silicon Cable

Key Features

- Intrinsically Safe with European, USA, South African, Indian, Korean and Australian approvals
- For use with data collector

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

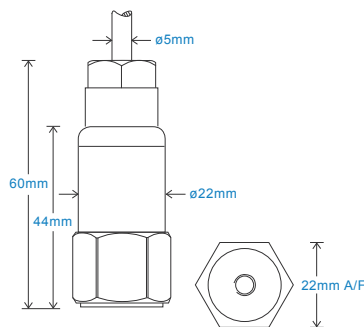

Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Maximum Cable Length	1000 metres
Standard Cable Length	5 metres
Screened Cable	Silicon - length to be specified with order
Mounting Threads	see: 'How To Order' table
Submersible Depth	100 metres max (10 bar)


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	see: attached certification details
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

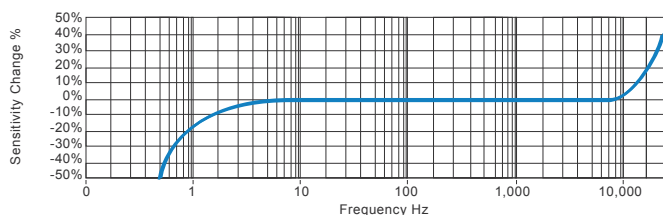

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



Certifications



This product is certified in accordance with
UL 913, 8th Ed. Rev. December 6, 2013
CAN/CSA C22.2 No. 157-92 (R2012) +Upd1 +Upd2



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS038.18



HS-100I Intrinsically Safe Accelerometer

AC acceleration output via Silicon Cable


Intrinsically Safe Requirements

Maximum Cable Length	See website www.hansfordsensors.com - see attached system drawing	Australia Approval Group I	IECEx ITA 11.0013X Ex ia I Ma (-55°C ≤ Ta ≤ +110°C)
Certificate details: Group I	IECEx BAS07.0037X Baseefa07ATEX0149X ⓈI M1 Ex ia I Ma (-55°C ≤ Ta ≤ +110°C)	US/Canada Approvals Class I, II, III, Division 1, 2, Groups A - G, T4, -55°C to +110°C, IP65 Class I, Zone 0, AEx, ia, IIC, T4, Ga, -55°C to +110°C Zone 20, AEx, ia, IIIC, T130°C, IP65, Da, -55°C to +110°C	Certificate No. USTC/15/FAI/01350
Certificate details: Group II (ignition temperature 130°C)	IECEx BAS07.0035X Baseefa07ATEX0144X ⓈII 1GD Ex ia IIC T4 Ga Ex ia IIIC T130°C IP65 Da (-55°C ≤ Ta ≤ +110°C)	Class I, II, III, Division 1, 2, Groups A - G, T6, -55°C to +60°C Class I, Zone 0, AEx, ia, IIC, T6, Ga, -55°C to +60°C Zone 20, AEx, ia, IIIC, T80°C, IP65, DA, -55°C to +60°C	
Certificate details: Group II (ignition temperature 80°C)	IECEx BAS07.0035X Baseefa07ATEX0144X ⓈII 1GD Ex ia IIC T6 Ga Ex ia IIIC T80°C IP65 Da (-55°C ≤ Ta ≤ +60°C)	South African Approval Korean Approval Group II	Certificate No. MASC S/16-0231X Group II (As Baseefa/ATEX) MASC M/16-0230X Group I (As Baseefa/ATEX) Certificate No 19-AV4BO-0048X Ex ia IIC T6/T4 T6 -55°C < Ta < +60°C T4 -55°C < Ta < +110°C
Accelerometer System Certificate	Baseefa07Y0145 Ex ia IIC T6 (-55°C ≤ Ta ≤ +60°C) Ex ia IIC T4 (-55°C ≤ Ta ≤ +110°C) On request - consult Sales Office	Terminal Parameters Ui = 28V, Li = 93mA, Pi = 0.65W Ci = 9.9nf Li = 7μF or Li/Ri = 15.4μF/Ohm Ui = 28V, Li = 93mA, Pi = 0.65W Ci = 83nf Li/Ri = 15.4μF/Ohm	
Terminal Parameters	Ui = 28V, Li = 93mA, Pi = 0.65W Ci = 83nf Li/Ri = 15.4μH/Ohm	System Connections	see attached system drawings
500V Isolation	Units Will Pass A 500V Isolation Test	Barrier	1 x Pepperl + Fuchs Galvanic Isolator KFD2-VR4-Ex1.26 (BAS02ATEX7206) see attached system drawings
Certified Temperature Range	Ex ia IIC T6 Ga (-55°C ≤ Ta ≤ +60°C) (Gas) Ex ia IIIC T80°C IP65 Da (-55°C ≤ Ta ≤ +60°C) (Dust) Ex ia IIC T4 Ga (-55°C ≤ Ta ≤ +110°C) (Gas)* Ex ia IIIC T130°C IP65 Da (-55°C ≤ Ta ≤ +110°C) (Dust)* Ex ia I Ma (-55°C ≤ Ta ≤ +110°C) (Mining) *On request - consult Sales Office	1 x MTL Zener Barrier MTL7728+ (BAS01ATEX7217) or Pepperl + Fuchs Zener Barrier Z728 (BAS01ATEX7005) or any other barrier that conforms to system drawings on website	
		Notes: Special conditions of safe use for Group I & II. The free end of the cable on the integral cable version of the apparatus must be terminated in an appropriate dust-proof enclosure.	

Intrinsically Safe Requirements for IC3 Variations

HS-100IC3 Variation is certified as Category 3 equipment. These sensors are only certified for use within Zones 2.		Certified Temperature Range	Ex ic IIC T4 Gc (-55°C ≤ Ta ≤ +110°C)
		Terminal Parameters	Ui = 25.2V, Ii = 146mA, Pi = 0.92W Ci = 83nF Li 66μH
Certificate Details: Group II (ignition temperature 130°C)	IECEx BAS17.0054X Baseefa7ATEX0069X Ex II 3G	500V Isolation	Units will pass a 500V Isolation Test
	Ex ic IIC T4 Gc (-55°C ≤ Ta ≤ +110°C)	Special Conditions of Use:	The Ci and Li parameters listed on the equipment certificate must be taken into account when connecting this equipment.

How To Order

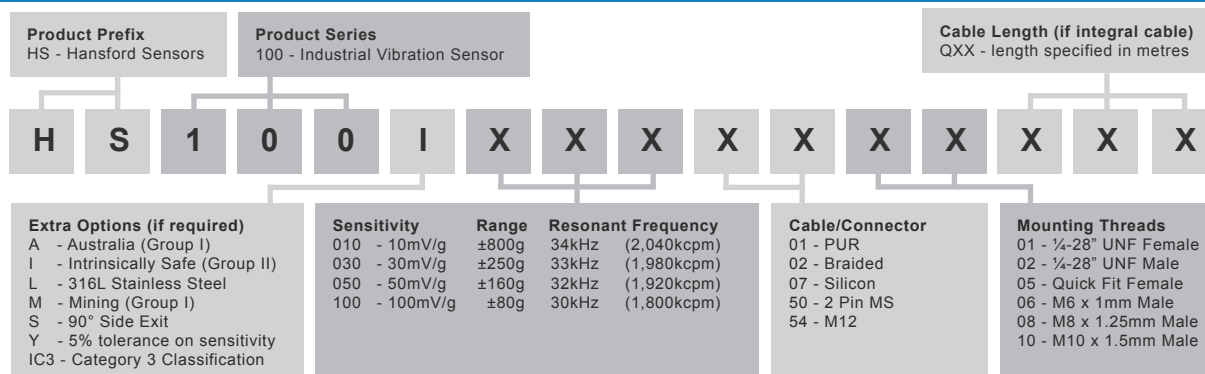

HS-100I Intrinsically Safe Accelerometer



AC acceleration output via PUR Cable

Key Features

- Intrinsically Safe with European, USA, South African, Indian, Korean and Australian approvals
- For use with data collector

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

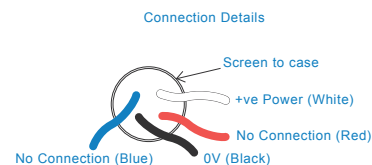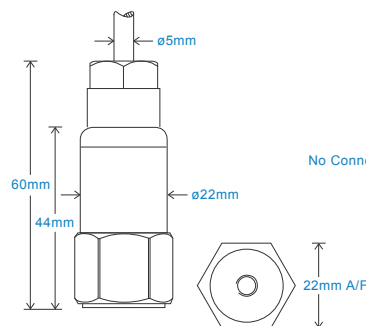

Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) $\pm 5\%$ 1.5Hz (90cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.8Hz (48cpm) to 15kHz (900kcpm) $\pm 3\text{dB}$
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Maximum Cable Length	1000 metres
Standard Cable Length	5 metres
Screened Cable	PUR - length to be specified with order
Mounting Threads	see: 'How To Order' table
Submersible Depth	100 metres max (10 bar)


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	see: attached certification details
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

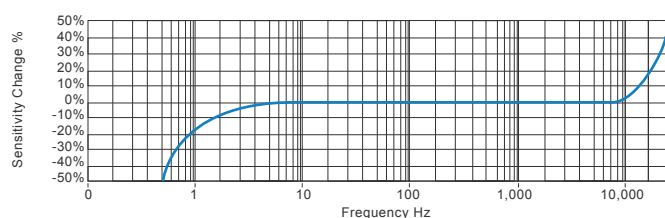

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



Certifications



This product is certified in accordance with
UL 913, 8th Ed. Rev. December 6, 2013
CAN/CSA C22.2 No. 157-92 (R2012) +Upd1 +Upd2



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS150.13



AC acceleration output via PUR Cable

Intrinsically Safe Requirements

Maximum Cable Length	See website www.hansfordsensors.com - see attached system drawing	Australia Approval Group I	IECEx ITA 11.0013X Ex ia I Ma (-55°C ≤ Ta ≤ +110°C)
Certificate details: Group I	IECEx BAS07.0037X Baseefa07ATEX0149X ⓈI M1 Ex ia I Ma (-55°C ≤ Ta ≤ +110°C)	US/Canada Approvals Class I, II, III, Division 1, 2, Groups A - G, T4, -55°C to +110°C, IP65 Class I, Zone 0, AEx, ia, IIC, T4, Ga, -55°C to +110°C Zone 20, AEx, ia, IIIC, T130°C, IP65, Da, -55°C to +110°C	Certificate No. USTC/15/FAI/01350
Certificate details: Group II (ignition temperature 130°C)	IECEx BAS07.0035X Baseefa07ATEX0144X ⓈII 1GD Ex ia IIC T4 Ga Ex ia IIIC T130°C IP65 Da (-55°C ≤ Ta ≤ +110°C)	Class I, II, III, Division 1, 2, Groups A - G, T6, -55°C to +60°C Class I, Zone 0, AEx, ia, IIC, T6, Ga, -55°C to +60°C Zone 20, AEx, ia, IIIC, T80°C, IP65, DA, -55°C to +60°C	
Certificate details: Group II (ignition temperature 80°C)	IECEx BAS07.0035X Baseefa07ATEX0144X ⓈII 1GD Ex ia IIC T6 Ga Ex ia IIIC T80°C IP65 Da (-55°C ≤ Ta ≤ +60°C)	South African Approval	Certificate No. MASC S/16-0231X Group II (As Baseefa/ATEX) MASC M/16-0230X Group I (As Baseefa/ATEX)
Accelerometer System Certificate	Baseefa07Y0145 Ex ia IIC T6 (-55°C ≤ Ta ≤ +60°C) Ex ia IIC T4 (-55°C ≤ Ta ≤ +110°C) On request - consult Sales Office	Terminal Parameters Ui = 28V, li = 93mA, Pi = 0.65W Ci = 9.9nf Li = 7µF or Li/Ri = 15.4µF/Ohm Ui = 28V, li = 93mA, Pi = 0.65W Ci = 83nf Li/Ri = 15.4µF/Ohm	Certificate No 19-AV4BO-0048X Ex ia IIC T6/T4 T6 -55°C < Ta< +60°C T4 -55°C < Ta< +110°C
Terminal Parameters	Ui = 28V, li = 93mA, Pi = 0.65W Ci = 83nf Li/Ri = 15.4µH/Ohm	System Connections	see attached system drawings
500V Isolation	Units Will Pass A 500V Isolation Test	Barrier	1 x Pepperl + Fuchs Galvanic Isolator KFD2-VR4-Ex1.26 (BAS02ATEX7206) see attached system drawings
Certified Temperature Range	Ex ia IIC T6 Ga (-55°C ≤ Ta ≤ +60°C) (Gas) Ex ia IIIC T80°C IP65 Da (-55°C ≤ Ta ≤ +60°C) (Dust) Ex ia IIC T4 Ga (-55°C ≤ Ta ≤ +110°C) (Gas)* Ex ia IIIC T130°C IP65 Da (-55°C ≤ Ta ≤ +110°C) (Dust)* Ex ia I Ma (-55°C ≤ Ta ≤ +110°C) (Mining) *On request - consult Sales Office	1 x MTL Zener Barrier MTL7728+ (BAS01ATEX7217) or Pepperl + Fuchs Zener Barrier Z728 (BAS01ATEX7005) or any other barrier that conforms to system drawings on website	
Notes: Special conditions of safe use for Group I & II. The free end of the cable on the integral cable version of the apparatus must be terminated in an appropriate dust-proof enclosure.			

Intrinsically Safe Requirements for IC3 Variations

HS-100IC3 Variation is certified as Category 3 equipment. These sensors are only certified for use within Zones 2.		Certified Temperature Range	Ex ic IIC T4 Gc (-55°C ≤ Ta ≤ +110°C)
		Terminal Parameters	Ui = 25.2V, Ii = 146mA, Pi = 0.92W Ci = 83nF Li 66μH
Certificate Details: Group II (ignition temperature 130°C)	IECEX BAS17.0054X Baseefa7ATEX0069X Ex II 3G	500V Isolation	Units will pass a 500V Isolation Test
	Ex ic IIC T4 Gc (-55°C ≤ Ta ≤ +110°C)	Special Conditions of Use:	The Ci and Li parameters listed on the equipment certificate must be taken into account when connecting this equipment.

How To Order

